

Chas. Hude

Patents • Trade Marks • Designs

The European Patent Office
Erhardtstrasse 27
D-80298 Munich
Germany

Att: The International Preliminary Examining
Authority

10/507093
PATENTS AND DESIGNS
Tage Nørgaard ° *
Ulrik Nørgaard ° *
Ole Thierry-Caen ° *
Peter Kim Jensen ° *
Ulla C. Klinge ° *
Jørgen Sliger ° *
Henrik Zeuthen-Aagaard ° *
Erik Lichtenberg ° *
Bent Christensen ° *
Henrik Dylmer ° *
Peter Englev ° *
Ebbe Johansen
Ulrik von Freiesleben
Rasmus Post
Morten Rosted
Jens-Holger Stellingner *
Mikkel Bender
Steven R. Kitchen
Susanne Nord secretariat
Kirsten M. Jensen annuities
Kaj L. Henriksen ° °
Henrik Jespersen ° °
Claus Hyllinge °
Birgitte Waagepetersen ° °
Christian Kragelund ° °
Peter Larsen ° °
Kristiane B. Vandborg °
Charlotte Munck °
Sanna D. Hartvigsen renewals
Sonja Nielsen assignments
SEARCHES
Louise Dalsgaard
ACCOUNTING/DP
Steffen Hussing
° Member of The Association
of Danish Patent Agents
* European Patent Attorney
° European Trade Mark
Attorney

DT09 Rec'd PCT/PTO 07 SEP 2004
15 April 2004

Dear Sirs

International Application No PCT/IB03/00832
Applicant: Inter IKEA Systems B.V. et al
My ref: 77139 TN/kp

In reply to the Written Opinion of 20 January 2003 please find enclosed a new set of claims, a revised description adapted to the new claims and a new set of corrected drawings.

The new claim 1 corresponds to the old claim 1 (of 12 December 2003), the contents of the last three lines of the old claim 3 being inserted at the end of claim 1; further some minor linguistic adaptations have been made, especially the word "small" has been cancelled in the last line of the old claim 1.

The new claims 2, 4, 5 and 6 correspond to the old claims 2, 4, 5 and 6.

The new claim 3 corresponds to the old claim 3, however the last sentence "the phase displacement $\frac{\pi}{4}$ and $\frac{\pi}{3}$ " has been cancelled. Said contents has been inserted in claim 1.

In my opinion no new subject matter has been introduced by these amendments.

Re the observations in the Written Opinion

Re III, item 1

As requested by the Examiner the unclarity of the term "small" has been dealt with.

Re III, items 2 and 3

The description has been revised. Thus in the introduction to the description the contents of EP-A-0424526, WO-A-0071277 and US-A-6207242 has been mentioned in the section: Background Art. The recitation of the claims in said introduction has been revised according to the new wording of the claims.


In the detailed portion of the description embodiments not covered by the claims have been deleted.

As to the new drawings the new Figure 1 corresponds to the old Figure 5 with the optional plane paper layer 15 being added (just as it was the case in the old Figure 4) and corrected reference numerals have been inserted.

The new Figure 2 corresponds to the old Figure 3. The rest of the old Figures has been deleted.

It is respectfully requested that the Examiner accepts the patentability of the invention.

Yours faithfully
CHAS. HUDE A/S


Tage Nørgaard
Representative of the Applicant

Encs:

Amended claims 1-6 (pages 9, 9a and 10)

Revised pages of the description (pages 1, 1a, 2, 3, 4, 5, 6, 7 and 8)

New set of drawings (Fig. 1 and Fig. 2)

Draft of the claims

Draft of the description

Form 1038

Claims

1. A packaging material of the corrugated cardboard type made by gluing together a plane paper layer (11) and an auxiliary paper layer (12) with waves presenting an amplitude (a) perpendicular to the plane of propagation of the auxiliary paper layer, and
 5 where the wave tops form a system of substantially parallel waves (10, 10', 10'') presenting an amplitude (b) in the plane of propagation of said auxiliary paper layer (13), a second plane paper layer (13) being arranged below said auxiliary paper layer (12), **characterised in**, that it comprises a second auxiliary paper layer (14) arranged below said second plane paper layer (13) and optionally a third plane paper layer (15) and in
 10 that as far as the waves are concerned which present an amplitude perpendicular to the direction of propagation of the two auxiliary paper layers (12, 14), a phase displacement φ is provided between the waves of these layers, φ being in the range of

$$\frac{\pi}{4} - \frac{\pi}{3}$$

2. A packaging material according claim 1, **characterised in**, that the waves of at least
 15 one type of waves on the auxiliary paper layers (12, 14) are rather flat on the sides in such a manner that the waves are of a substantially serrated shape, viz. triangular waves with tops and bottoms which are optionally slightly rounded, or the waves can be substantially "square", viz. square waves.

3. A packaging material according to claim 1, **characterised in**, that the surface of
 20 each auxiliary paper layer (12,14) follows a face substantially corresponding to the mathematical functional expression:

$$z(x,y) = a \sin\left(\frac{2\pi}{\lambda_1} x + \frac{\pi}{2}\right) + b \sin\left(\frac{2\pi}{\lambda_2} y\right)$$

9a

where a and λ_1 represent the amplitude and the wavelength, respectively, of the waves perpendicular to the plane of propagation of the auxiliary paper layer, and where b and

λ_2 represent the amplitude and the wavelength, respectively, of the waves in the plane of said auxiliary paper layer, viz. the plane of propagation, and that the ratio $\frac{a}{b}$ of the amplitudes for the two types of waves may be in the range of 0.10 to 0.60, preferably 0.15 to 0.50, especially 0.22 corresponding to $a = 0.5$ mm and $b = 2.25$ mm.

- 5 4. A packaging material according to one or more of the claims 1 to 3, **characterised in**, that the ratio $\frac{\lambda_1}{\lambda_2}$ of the wavelengths for the two types of waves is in the range of 0.09 to 0.20 and preferably is approximately 0.15 corresponding to $\lambda_1 = 3.5$ mm and $\lambda_2 = 23.5$ mm.

- 10 5. A packaging material according to claim 2, **characterised in**, that the plane paper layers (11, 13) and the auxiliary paper layers (12,14) are of the same thickness, preferably between 0.05 and 0.3 mm, such as 0.1 mm, and that the auxiliary paper layers (3) is of a weight of 50 to 250 g/m², especially 70 to 150 g/m².

6. A packaging material according to claim 1 or 2, **characterised in**, that starch-based or cold-water glue is used for the lamination of the layers.

Title: A packaging material of the corrugated cardboard type

Technical Field.

A packaging material of the corrugated cardboard type as stated in the preamble of claim 1.

5 Background Art

It is known to manufacture corrugated cardboard which includes a plane paper layer. A corrugated auxiliary paper layer is glued onto the plane paper layer, and the corrugations of said auxiliary paper layer present an amplitude perpendicular to the direction of propagation of the packaging material. All the ridges are arranged as rectilinear
10 parallel corrugations. However, problems are involved in forming folding lines in the material as a folding along a specific line has a tendency to be staggered relative to the adjacent vales. In addition, a printing by means of raster on the plane paper layer implies due to the washboard effect that the printed colours opposite the ridges are of a slightly different tint than the colours opposite the wave. In addition, the tear resistance
15 parallel to the waves is weak. The rigidity of the material and the capability of absorbing impacts of said material are not so good either as said material is not sufficiently stiff.

EP-A-0424526 (Figs. 4 and 6) discloses a packaging material with only one auxiliary corrugated layer.

20 WO-A-071277 discloses a sheet and strip material with only one corrugated auxiliary layer.

US-A-6207242 (Fig. 3) discloses a packing material with two auxiliary corrugated layers of the same type, the phase displacement between corresponding waves being 90° or $\frac{\pi}{2}$.

5 US-A-4012276 discloses a packaing material with two auxiliary corrugated layers of a different type, a wave phase displacement existing between said layers of a different type.

Brief Description of the Invention

The object of the invention is to provide a packaging material of the above type which is more suited for being subjected to a printing than hitherto known, which is more stiff
10 than hitherto known, and which presents an improved tear resistance.

The packaging material according to the invention is characterised in the features stated in the characterising clause of claim 1. The two auxiliary corrugated layers are of the same type. As a result, the packaging material becomes more stiff than hitherto known, viz flexurally rigid, without the lightness and voluminocity of the material being af-
 5 fected. The folding of such waves requires a considerable force. In addition, the material turned out to be highly suited for imprints. The tear resistance has been increased because the possibility of tearing up the material along a wave has been reduced. The folding lines are very distinct as they always extend across some ridges.

According to the invention, the plane paper layer and the auxiliary paper layer may be
 10 of the same thickness, preferably between 0.05 and 0.3 mm, and preferably be approximately 0.1 mm, where the auxiliary paper layer may be of a weight of 50 to 250 g/m², especially 70 to 150 g/m². The resulting packaging material is very durable.

Moreover, in the packaging material according to the invention a starch-based glue or cold-water glue may be used for the lamination of the layers. Such a packaging material
 15 turned out to present a high cohesive power and a long durability.

According to the invention, the surface of each auxiliary paper layer may follow a face substantially corresponding to the functional expression:

$$z(x, y) = a \sin\left(\frac{2\pi}{\lambda_1} x + \frac{\pi}{2} + b \sin \frac{2\pi}{\lambda_2} y\right)$$

where a and λ_1 represent the amplitude and the wavelength, respectively, of the waves perpendicular to the plane of propagation of the auxiliary paper layer, and where b and λ_2 represent the amplitude and the wavelength, respectively, of the waves in the plane of said auxiliary paper layer, the ratio $\frac{a}{b}$ of the amplitudes for the two types of waves

- 5 being be in the range of 0.10 to 0.60, preferably 0.15 to 0.50, especially 0.22 corresponding to $a = 0.5$ mm and $b = 2.25$ mm This embodiment of the packaging material turned out to be particularly stiff and suited for transportation of large separate furniture parts and plates.

Furthermore, the ratio $\frac{\lambda_1}{\lambda_2}$ of the wavelengths for the two types of waves may accord-

- 10 ing to the invention be in the range of 0.09 to 0.20, preferably 0.15 corresponding to $\lambda_1 = 3.5$ mm and $\lambda_2 = 23.5$ mm. This has proved particularly advantageous.

Finally, the waves of at least one type of waves may according to the invention be rather flat on the sides in such a manner that said waves are substantially serrated where the ridges and the grooves are slightly rounded, or the waves may be substantially square. As a result, an inexpensive manufacture of the auxiliary paper layer is obtained
5 because the pressing tools used for pressing the auxiliary paper layer into shape can be manufactured at a lower price than hitherto known.

Brief Description of the Drawing

The invention is explained in detail below with reference to the drawing, in which

Fig. 1 is a perspective view of a portion of a packaging material according to the inven-
10 tion, where a small phase displacement appears between the waves presenting an amplitude perpendicular to the first auxiliary paper layer and the waves presenting an amplitude perpendicular to the second auxiliary paper layer, and

Fig. 2 discloses in an XYZ-coordinate system an ideal embodiment of the waves of an auxiliary paper layer,

Best Mode for Carrying Out the Invention

The portion of the packaging material shown in Fig. 1 is formed as a laminate including a plane paper layer 11 and an auxiliary paper layer 12 arranged below the layer 11. Below the auxiliary layer 12 there is arranged a second plane paper layer 13. Below the latter there is arranged a second auxiliary paper layer 14 and optionally a third plane paper layer 15. The auxiliary paper layers include waves presenting an amplitude a perpendicular to the plane of propagation of the auxiliary paper layer, viz. follow the direction parallel to the arrow A. The wave top of these waves form in the auxiliary paper layers 12 and 14 a system of substantially parallel waves presenting amplitudes b in the plane of propagation of the auxiliary paper layers. The latter waves can also be called oscillating in parallel.

The plane paper layers 11 and 13 and the auxiliary paper layers 12 and 14 may be of the same thickness, preferably between 0.05 and 0.3 mm, such as 0.1 mm. Each auxiliary paper layer can for instance be of a weight of 50 to 250 g/m², especially 70 to 150 g/m².

A glue, such as a

starch-based glue or a cold-water glue, can for instance be used for the lamination of the layers.

As shown in Fig. 2 the surface of each auxiliary paper layer 12 and 14 can follow a face substantially corresponding to the mathematical functional expression:

$$z(x, y) = a \sin\left(\frac{2\pi}{\lambda_1} x + \frac{\pi}{2}\right) + b \sin\left(\frac{2\pi}{\lambda_2} y\right)$$

- 5 where a and λ_1 represent the amplitude and the wavelength, respectively, of the waves perpendicular to the plane of propagation of each auxiliary paper layer 13, and where b and λ_2 represent the amplitude and the wavelength, respectively, of the waves formed by the wave tops of the above-mentioned waves and presenting an amplitude in the plane of said auxiliary paper layers 12 or 14. The expression applies to a rectilinear
10 XYZ-coordinate system.

The ratio $\frac{a}{b}$ of the amplitudes for the two types of waves can be in the range of 0.10 to 0.60, preferably 0.15 to 0.50, and especially 0.22 corresponding to $a = 0.5$ mm and $b = 2.25$ mm.

- The ratio $\frac{\lambda_1}{\lambda_2}$ of the wavelengths for the two types of waves can be in the range of 0.09
15 to 0.20, and preferably be approximately 0.15 corresponding to $\lambda_1 = 3.5$ mm and $\lambda_2 = 23.5$ mm.

As far as the waves are concerned which present an amplitude a perpendicular to the direction of propagation of the auxiliary paper layers 12 and 14, a small phase displacement φ is provided between the waves of these layers, conf. Fig. 1. φ is in the range of $\frac{\pi}{4} < \varphi < \frac{\pi}{3}$. The plane paper layer 15 is optional.

- 5 In the auxiliary paper layers 12 and 14, at least the waves presenting an amplitude perpendicular to the plane of propagation of the packaging material may be provided with rather flat sides in such a manner that said waves are substantially serrated. The serrations can be provided with slightly rounded tops and bottoms, viz. triangularly wavy.
- 10 The waves presenting the amplitude perpendicular to the plane of propagation of the packaging material may also be substantially of a square wavy shape.

The packaging material according to the invention is advantageous in presenting a high flexural rigidity and a high capacity of absorbing impacts. In addition, the mate-

rial presents a high tear resistance because the possibility of tearing up the material along the waves has been highly reduced or eliminated. Furthermore, the material is advantageous in including folding lines which are always distinct because they always continue across the ridges which is an important feature in connection with a mechanical packing of articles. The washboard effect is minimized. Furthermore, the material is very suited for being provided with a graphical print. The material turned out to be particularly suited for packing plane furniture parts. Finally it should be noted that by using the packaging material according to the invention in connection with a packing machine it is possible to use the latter in a more efficient way.

- 10 Each plane paper layer can, of course, be of a weight in grammes per m^2 , which deviates from the weight in grammes per m^2 of each single auxiliary paper layer.

The invention may be modified in many ways without thereby deviating from the scope of the invention.

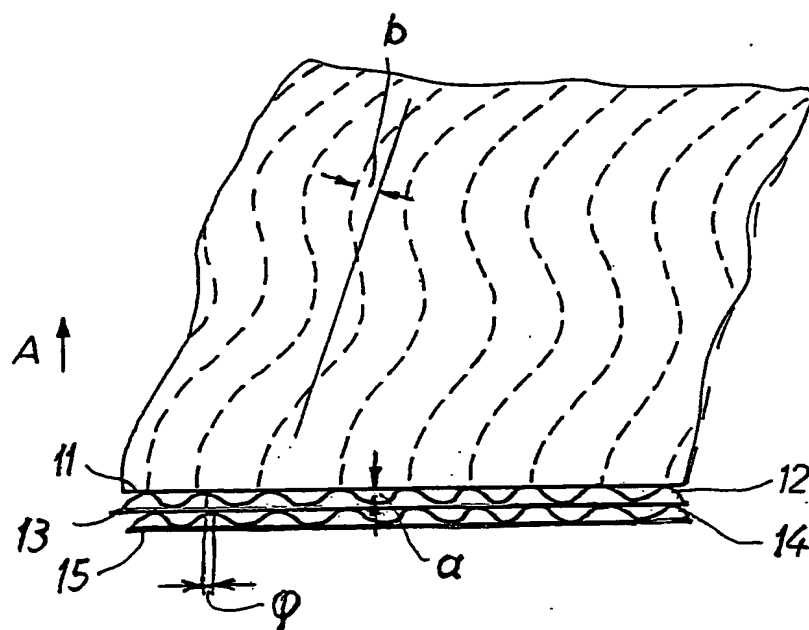


Fig. 1

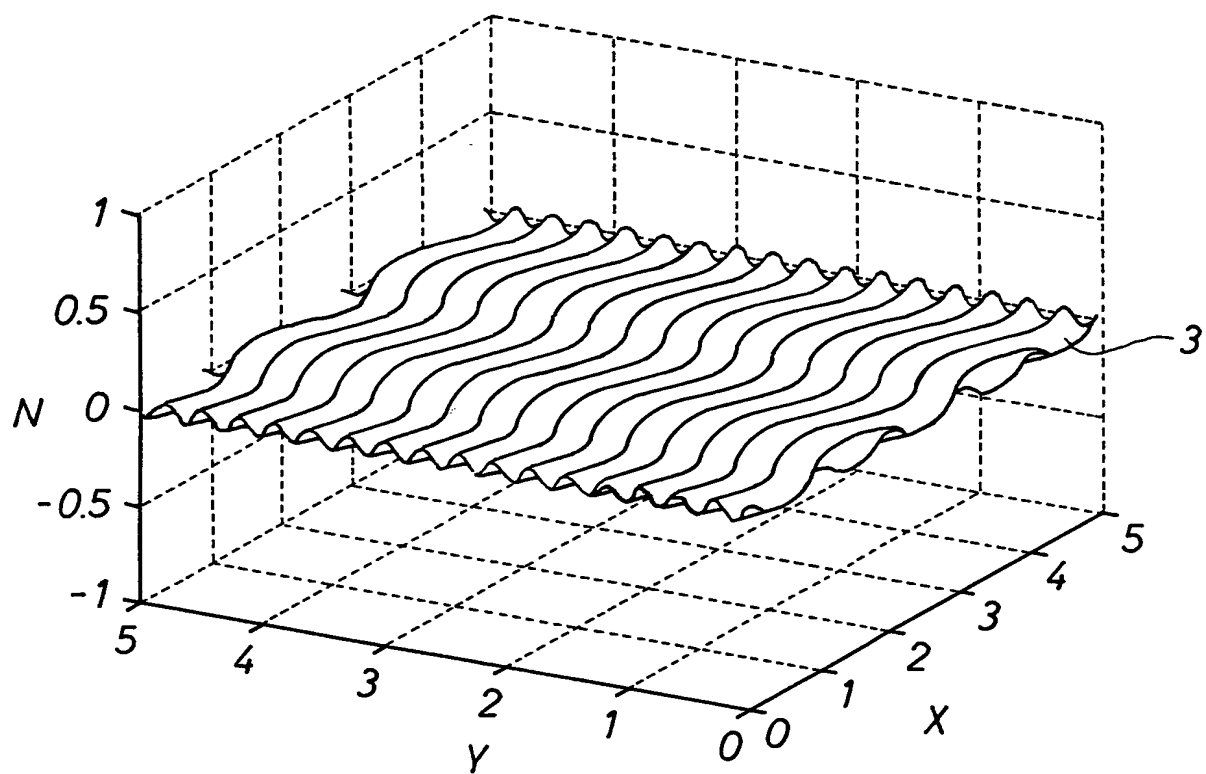


Fig. 2